


1. Position machine & apply brakes (see below )

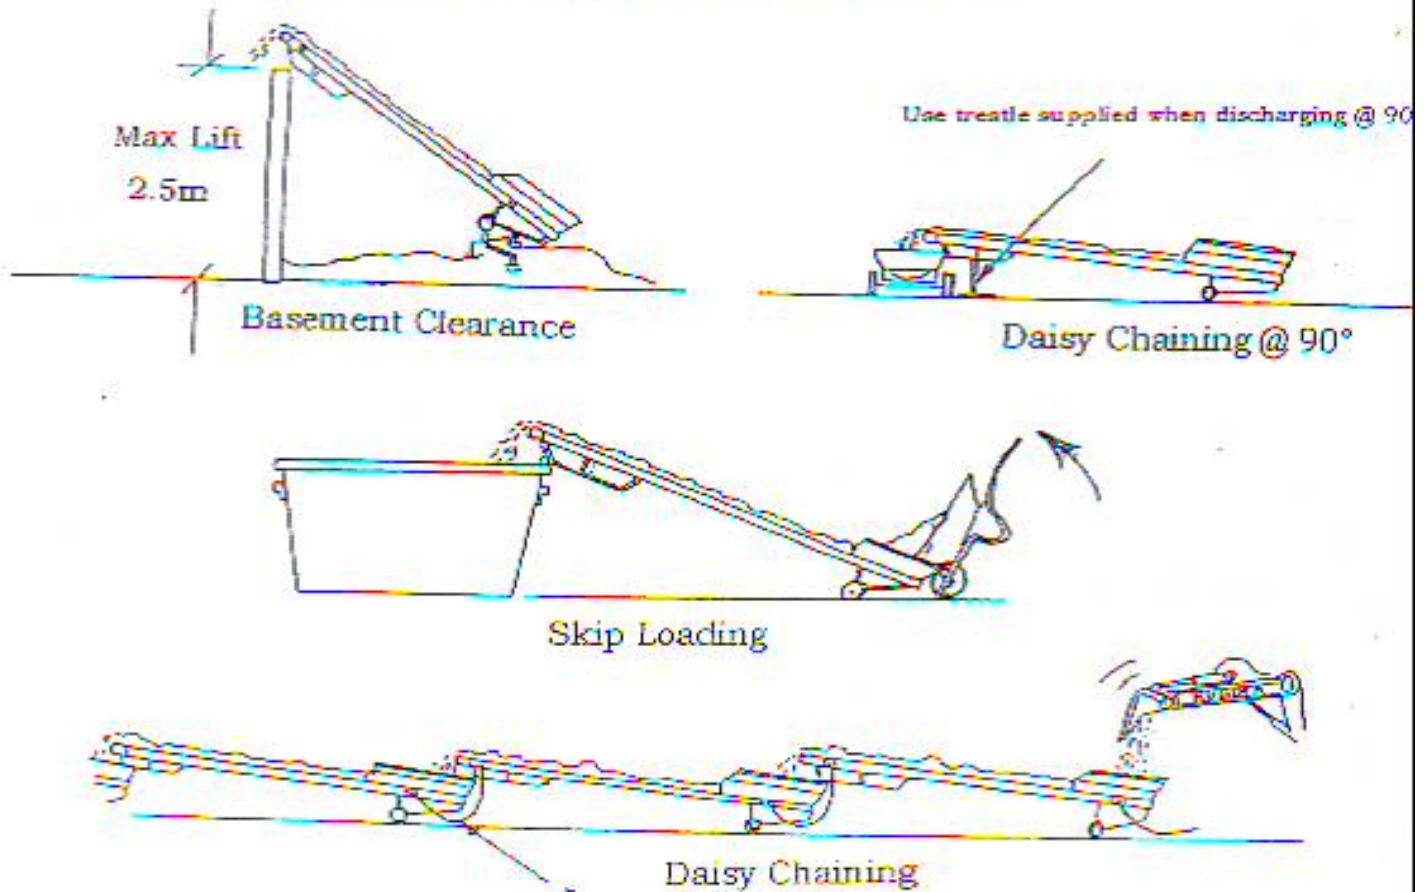

2. Fit Hopper to base of machine (fig 1)
3. Connect to power. 220v - 16A - max 4 machines interlinked (\* always use short cable when linking machines - as above)
4. Select mode/speed
5. Load Hopper with material to be conveyed (max 150kg) Take care not to 'choke' machine when loading with a mini-digger etc. Never drop large chunks of concrete onto belt as this may cause damage.

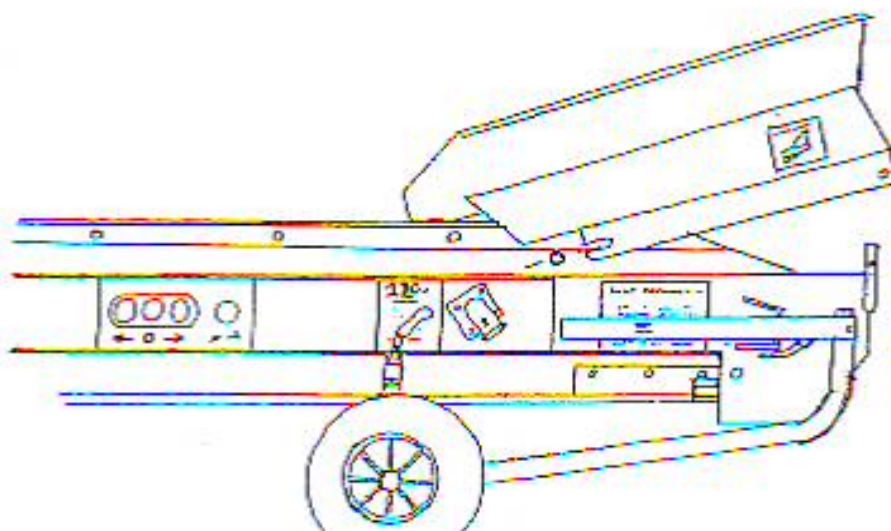


fig.1

Supplied by:  
Centenary Hire (07) 3375 5068



### Shifta Conveyor

Length:	4.5 mtrs 3.5 mtrs
Construction:	Aluminium Locking puncture proof wheels
Speed:	28 m/min forward and reverse 33 m/min forward and reverse
Belt:	Deep troughed rubber chevron
Max Payload:	150 kg
Power:	220v – 16A supply 4 machines interlinked per supply
Accessories:	Heavy duty hopper (Detachable) Base stand - for stability and angle adjustment Leads Trestle
Weight:	96 kg

Max angle 50 deg depending on material

Materials - stones, aggregate, soil, concrete, chippings, etc.

In built belt tracking and scraper (scraper front and back)

Emergency stop buttons

Adjustable head for tensioning the belt.